

Specification Sheet

Project Name:

Specifier Name & Location:

Quantity/Type:



Acrylic D-12 18" Pendant | AP51218

Stylish modern lighting with brilliant accent colors and distinctive geometric shapes; our Lite pendants offer modern elegance, perfect ambient illumination and a flair for contemporary charm.

Included:

- Lumenate® washable diffuser
- 6' black or white cord
- Mounts to standard J-box
- Suitable for damp locations
- Etched white acrylic bottom lens
- White acrylic frame
- Canopy

Weight: 3-4 lbs



Made In America



Cord Color

Black
White


Select Canopy/Stem Finish

[View Choices](#)

F11 White
F3 Black
F2 Chrome

Lumenate® Diffuser

[View choices on website](#)

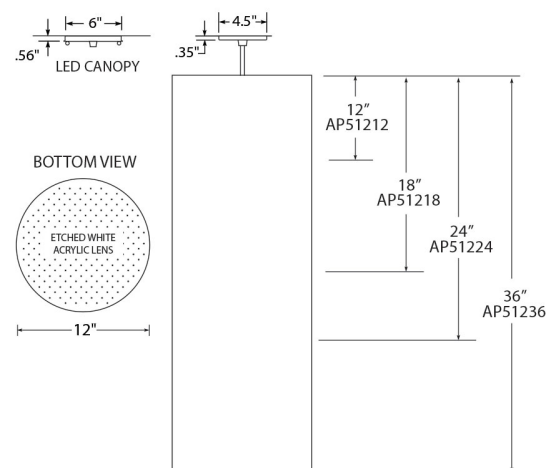



Lamping

L411-LED 2140 Source Lumens 21W (0-10V 1% UNV or 120V Phase)
*AP51218-LED 1721 Delivered Lumens 21W (0-10V 1% UNV or 120V Phase)
*AP51224-LED 1705 Delivered Lumens 21W (0-10V 1% UNV or 120V Phase)
*Asterisk represents interpolated results. No actual datasheets exist.
AP51212-LED 1737 Delivered Lumens 21W (0-10V 1% UNV or 120V Phase)
AP51236-LED 1674 Delivered Lumens 21W (0-10V 1% UNV or 120V Phase)
INC 1/Med. Base (lamp not included), Ketra ready

Voltage

120V
277V

Color Temperature

†CCT 3000K Dim-Warm
CCT 2200K CRI 90
CCT 2700K CRI 90
CCT 3000K CRI 90
CCT 3250K CRI 90
CCT 3500K CRI 90
CCT 4000K CRI 90
CCT 5000K CRI 90

+Options

Suspension

A200 - wall mount arc 34"
B200 - wall mount linear 18"
CXS - cord braided silver
CXX - cord extra (specify length)
STM - Field cuttable ball swivel stem with 1.78" deep canopy. Specify length in 1' increments.

Bottom Lenses

LBA2 - applied Lumenate® bottom lens

Canopy

[View Choices](#)

C1010 - square canopy 10"
C66 - square canopy 6"
CAC - canopy alternative color
CC240 - cluster canopy 24" dia. (specify arrangement and heights)
CF105 - flair canopy 10.5" dia.
CR432 - cluster canopy 4.5" x 42" (specify arrangement and heights)
CR860 - cluster canopy 8" x 60" (specify arrangement and heights)
CSF105 - flair swivel canopy 10.5" dia.
CSF6 - swivel stem on CF6

LED

†BTW - Bluetooth Wireless Dimming
†ELDO - eldoLED Dimming (requires 2.28" deep canopy)
†LUT - Lutron EcoSystem (requires 2.28" deep canopy) 1% SoftOn/FTB
EMR - Remote emergency battery backup. Requires stem or 2 power cords.