

Specification Sheet

Project Name:

Specifier Name & Location:

Quantity/Type:



Linear Acoustic Box 40x14 Pendant | P1440A

Lumetta's Acoustic lighting solutions pair illumination and design with sound dampening acoustics that control high noise levels and vibration.

Included:

- Canopy finished to match frame
- Suitable for damp locations
- Two suspension cables
- Two toggle bolts for ceiling mount
- Two shade colors
- Surface washable shade
- Welded steel/aluminum
- LBW bottom lens etched white acrylic
- LTW top lens white acrylic
- 6' black or white cord

Weight: 15 lbs

 Made In America



Cord Color


Black
White

Select Canopy/Stem Finish

[View Choices](#)

F11 White
F10 Hammered Copper
F8 Steel
F7 Bronze
F6 Brass
F5 Copper
F4 Earth
F3 Black
F2 Chrome
F13 Polo

Linear Acoustic Side Shades 1 [View Acoustic Shades](#)

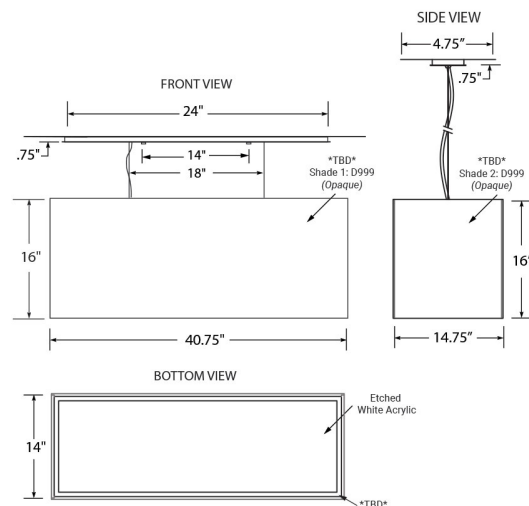

Linear Acoustic End Shades 2 [View Acoustic Shades](#)



Lamping

L407-LED 3164 Delivered Lumens 50.4 W (0-10V
1% UNV)

Color Temperature

CCT 3000K CRI 83
CCT 3500K CRI 83
CCT 4000K CRI 83
CCT 5000K CRI 83

+Options

Suspension

CXX2 - cord extra (specify length)
STM - Two field cuttable ball swivel stems

Canopy

[View Choices](#)

CAC - canopy alternative color

Top Lenses

LTC5 - top lens clear acrylic
LTO5 - top lens opaque
LTY5 - top lens metal perf.

Bottom Lenses

LBA5 - applied Lumenate®
LBY5 - bottom lens metal perf.

LED

†BTW - Bluetooth Wireless Dimming
†ELDO - eldoLED Dimming
EMI - Internal emergency battery backup. Requires
stems or 2 power cords.

IES Files

P1440A LED.pdf
P1440A LED.ies