Taper 32" L2 Pendant PT3225L2

Design modifications are always welcome.

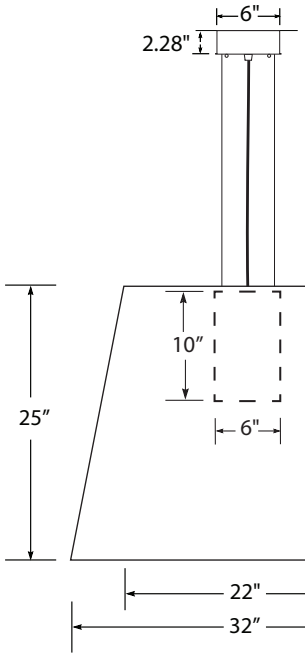

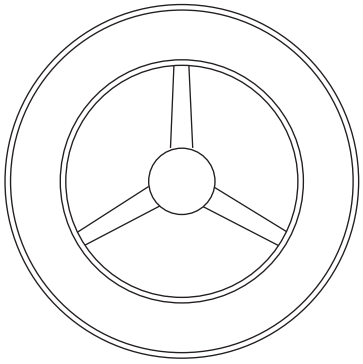

BOTTOM VIEW

- Welded Steel/Aluminum/Acrylic Weight: 11 lbs
- Two Shades
- White Lamp Enclosure
- 6' Black or White Cord
- Two Suspension Cables
- Canopy finished to match frame
- Mounts to standard J-box
- Suitable for damp locations

C UL US LISTED

MADE IN USA

PT3225L2 – [ ] – [outer | inner] – [ ] – [ ] – [ ]

CORD COLOR

- ☐ Black
- ☐ White

FINISH

F2 Chrome
F3 Black
F4 Earth
F5 Copper
F6 Brass
F7 Bronze
F8 Steel
F10 Hammered Copper
F11 White

SHADES

View L2 Lumenate® Shade Choices

Select an inner shade and an outer shade. Keep in mind that the outer shade layer is opaque to enhance the inner color and/or graphics.

LAMPING

L411 - LED 1210 Delivered Lumens 21W
3000K Dimming: 0-10V 1% UNV or 120V Phase

Please contact customer service for component specifications, including additional color temperatures.

INC 1/Med. Base

VOLTAGE

120V
277V

+ OPTIONS

SUSPENSION OPTIONS

STM - Field Cuttable Ball Swivel Stem with 1.78" deep canopy. *Specify length in 1' increments.*

CXX2 - Cord Extra (*Specify length)*
CXS2 - Cord Braided Silver

A200 - Wall Mount Arc 34"

CANOPY OPTIONS

CAC - Canopy Alternative Color
CF105 - Flair Canopy 10.5" Dia.
C66 - Square Canopy 6"
C1010 - Square Canopy 10"

CLUSTER CANOPIES - See website for a variety of sizes and options. *Specify arrangement and heights.*

NOTE: All canopy options for LED requires a custom 2.28" height.

LED OPTIONS

EMR - Remote Emergency Battery Backup
Requires Stem or 2 Power Cords

Project Name

Specifier Name & Location

Quantity

Notes

Lumetta®

Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 **www.lumetta.com**

This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.