


Acrylic D-6 Pendant AP506__

Design modifications are always welcome.

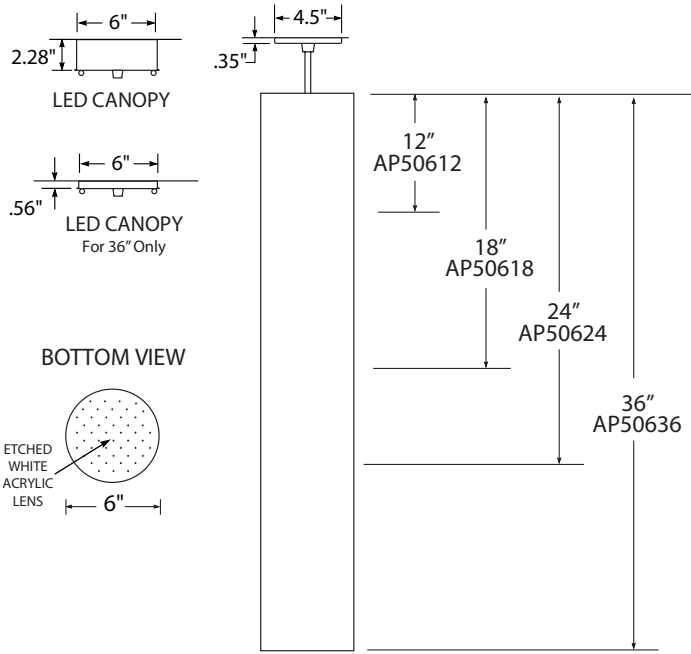

- Acrylic Frame weight: 1.5- 2 lbs
 - LUMENATE® washable diffuser
 - Etched white acrylic bottom lens
 - 6" black or white cord
 - Canopy
 - Mounts to standard J-box
 - Suitable for damp locations
- US LISTED
MADE IN USA

AP506__							
STYLE #	FRAME	CANOPY	CORD	DIFFUSER	LAMPING	VOLTAGE	
AP50612 AP50618 AP50624 AP50636	White Acrylic	F2 Chrome F3 Black F11 White	Black White	Select from any of our LUMENATE® Diffuser options.	L411 - LED 2140 Initial Lumens 21W 3000K Dimming: 0-10V 1% UNV or 120V Phase *AP50612 - LED 1435 Delivered Lumens 21W *AP50618 - LED 1420 Delivered Lumens 21W *AP50624 - LED 1404 Delivered Lumens 21W *AP50636 - LED 1372 Delivered Lumens 21W <i>*Asterisk represents interpolated results. No actual datasheets exist. Please contact customer service for component specifications including additional color temperatures.</i>	Lamps not included: INC 1/ Med. Base	120V 277V

+ OPTIONS

SUSPENSION OPTIONS	CANOPY OPTIONS	LENS OPTIONS	LED OPTIONS
STM - Field Cuttable Ball Swivel Stem with 1.78" deep canopy. <i>Specify length in 1" increments.</i> CXX - Cord Extra (<i>Specify length</i>) CXS - Cord Braided Silver <i>Not available in 36" LED</i> A100 - Wall Mount Arc 10" A200 - Wall Mount Arc 34" B200 - Wall Mount Linear 18"	CAC - Canopy Alternative Color CF6 - Flair Canopy 6" Dia CF105 - Flair Canopy 10.5" Dia CSF6 - Swivel Stem on CF6 CSF105 - Swivel Stem on CF105 CR432 - Cluster Canopy* 4.5" x 42" CR860 - Cluster Canopy* 8" x 60" CC240 - Cluster Canopy* 24" Dia C66 - Square Canopy 6" C1010 - Square Canopy 10" <i>* Specify arrangement and heights.</i>	LBA1 - Applied LUMENATE® Bottom Lens <i>NOTE: 12", 18", and 24" canopy options for LED requires a custom 2.28" height.</i>	EMR - Remote Emergency Battery Backup <i>36" Height Requires Stem or 2 Power Cords</i>

Project Name Specifier Name & Location Quantity




Notes

Acrylic D-8 Pendant AP508__

Design modifications are always welcome.



Shown: Acrylic D-8 18" Pendant

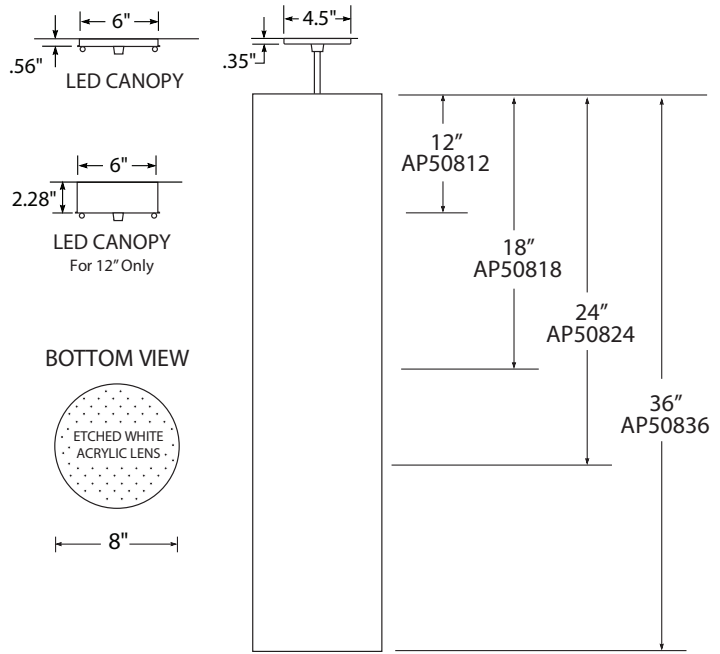

- Acrylic Frame
- LUMENATE® washable diffuser
- Etched white acrylic bottom lens
- 6" black or white cord
- Canopy
- Mounts to standard J-box
- Suitable for damp locations

weight: 2-3 lbs



AP508__							
STYLE #	FRAME	CANOPY	CORD	DIFFUSER	LAMPING	VOLTAGE	
AP50812 AP50818 AP50824 AP50836	White Acrylic	F2 Chrome F3 Black F11 White	Black White	Select from any of our LUMENATE® Diffuser options.	L411 - LED 2140 Initial Lumens 21W 3000K Dimming: 0-10V 1% UNV or 120V Phase *AP50812 - LED 1540 Delivered Lumens 21W *AP50818 - LED 1524 Delivered Lumens 21W *AP50824 - LED 1509 Delivered Lumens 21W *AP50836 - LED 1477 Delivered Lumens 21W <i>*Asterisk represents interpolated results. No actual datasheets exist. Please contact customer service for component specifications including additional color temperatures.</i> Lamps not included: INC 1/ Med. Base	120V 277V	

+ OPTIONS

SUSPENSION OPTIONS

STM - Field Cuttable Ball Swivel Stem with 1.78" deep canopy.
Specify length in 1' increments.

CXX - Cord Extra (Specify length)

CXS - Cord Braided Silver
Not available in 18", 24", and 36" LED

A100 - Wall Mount Arc 10"

A200 - Wall Mount Arc 34"

B200 - Wall Mount Linear 18"

CANOPY OPTIONS

CAC - Canopy Alternative Color

CF6 - Flair Canopy 6" Dia

CF105 - Flair Canopy 10.5" Dia

CSF6 - Swivel Stem on CF6

CSF105 - Swivel Stem on CF105

CR432 - Cluster Canopy* 4.5" x 42"

CR860 - Cluster Canopy* 8" x 60"

CC240 - Cluster Canopy* 24" Dia

C66 - Square Canopy 6"

C1010 - Square Canopy 10"

* Specify arrangement and heights.

LENS OPTIONS

LBA2 - Applied LUMENATE® Bottom Lens

NOTE: 12" canopy options for LED requires a custom 2.28" height.

LED OPTIONS

EMR - Remote Emergency Battery Backup
Requires Stem or 2 Power Cords in 18", 24", and 36" Heights.

Project Name

Specifier Name & Location

Quantity

Notes



Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 www.lumettainc.com


This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.

Acrylic D-12 Pendant AP512 __




Design modifications are always welcome.



Shown: Acrylic D-12 18" Pendant



BOTTOM VIEW

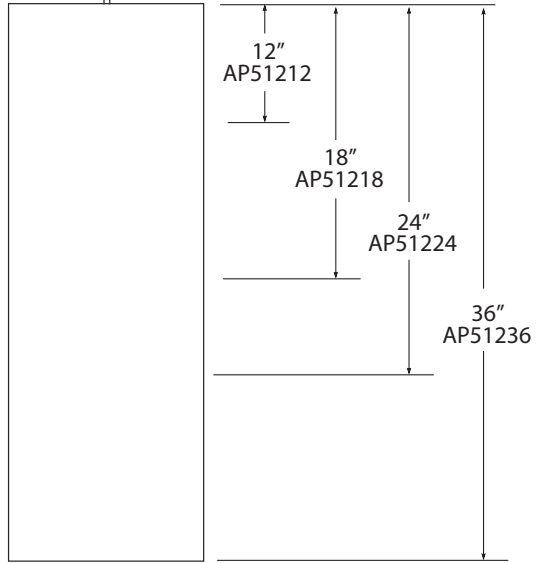

- Acrylic Frame
 - LUMENATE® washable diffuser
 - Etched white acrylic bottom lens
 - 6' black or white cord
 - Canopy
 - Mounts to standard J-box
 - Suitable for damp locations
- weight: 3-4 lbs
- US LISTED
MADE IN USA

AP512__							
STYLE #	FRAME	CANOPY	CORD	DIFFUSER	LAMPING		
AP51212 AP51218 AP51224 AP51236	White Acrylic	F2 Chrome F3 Black F11 White	Black White	Select from any of our LUMENATE® Diffuser options.	L411 - LED 2140 Initial Lumens 21W <i>3000K Dimming: 0-10V 1% UNV or 120V Phase</i> AP51212 - LED 1737 Delivered Lumens 21W *AP51218 - LED 1721 Delivered Lumens 21W *AP51224 - LED 1705 Delivered Lumens 21W AP51236 - LED 1674 Delivered Lumens 21W <i>*Asterisk represents interpolated results. No actual datasheets exist. Please contact customer service for component specifications including additional color temperatures.</i>		
					VOLTAGE		
					Lamps not included: INC 1/ Med. Base	120V 277V	

+ OPTIONS

SUSPENSION OPTIONS	CANOPY OPTIONS	LENS OPTIONS	LED OPTIONS
STM - Field Cuttable Ball Swivel Stem with 1.78" deep canopy. <i>Specify length in 1' increments.</i>	CAC - Canopy Alternative Color CF6 - Flair Canopy 6" Dia CF105 - Flair Canopy 10.5" Dia CSF6 - Swivel Stem on CF6 CSF105 - Swivel Stem on CF105 CR432 - Cluster Canopy* 4.5" x 42" CR860 - Cluster Canopy* 8" x 60" CC240 - Cluster Canopy* 24" Dia C66 - Square Canopy 6" C1010 - Square Canopy 10" <i>* Specify arrangement and heights.</i>	LBA2 - Applied LUMENATE® Bottom Lens	EMR - Remote Emergency Battery Backup <i>Requires Stem or 2 Power Cords (all sizes)</i>
CXX - Cord Extra (<i>Specify length</i>) CXS - Cord Braided Silver (<i>not LED</i>)			
A200 - Wall Mount Arc 34" B200 - Wall Mount Linear 18"			

Project Name

Specifier Name & Location

Quantity



Notes




Acrylic Drum 18" Pendant AP51814

Design modifications are always welcome.



- Acrylic Frame
- LUMENATE® washable diffuser
- Etched white acrylic bottom lens
- 6' black or white cord
- Three suspension cables
- Canopy
- Mounts to standard J-box
- Suitable for damp locations

weight: 5 lbs

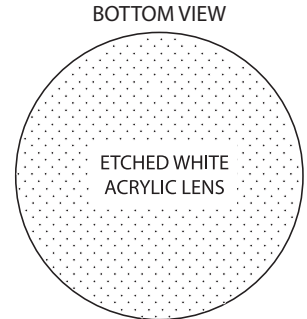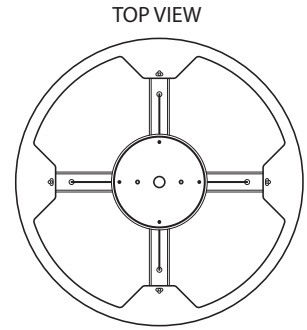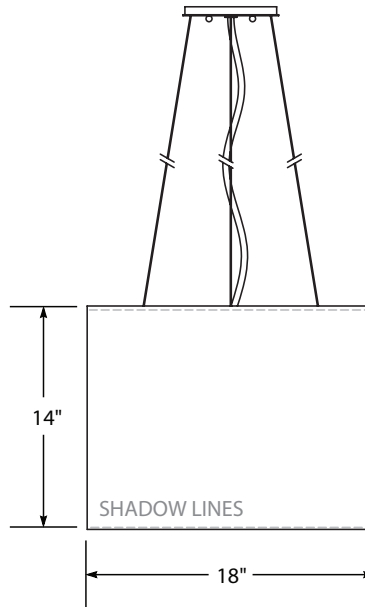

 US LISTED
MADE IN USA

AP51814							
FRAME	CANOPY	CORD	DIFFUSER	LAMPING			
White Acrylic	F2 Chrome F3 Black F11 White	Black White	Select from any of our LUMENATE® Diffuser options.	L411 - LED 2140 Initial Lumens 21W 3000K Dimming: 0-10V 1% UNV or 120V Phase See LED Reference Sheet for component specifications including additional color temperatures. Lamps not included: INC 1/Med. Base		CFL VOLTAGE	
						120V	
						277V	

+ OPTIONS

SUSPENSION OPTIONS

- STM** - Field Cuttable Ball Swivel Stem with 1.78" deep canopy. Specify length in 1' increments.
- CXX3** - Cord Extra (Specify length)
- CXS3** - Cord Braided Silver (not LED)
- A200** - Wall Mount Arc 34"
- B200** - Wall Mount Linear 18"

CANOPY OPTIONS

- CAC** - Canopy Alternative Color
- CF105** - Flair Canopy 10.5" Dia.
- C66** - Square Canopy 6"
- C1010** - Square Canopy 10"
- CLUSTER CANOPIES** - See website for a variety of sizes and options. Specify arrangement and heights.

LENS OPTIONS

- LTC3** - Top Lens Clear Acrylic
- LTY3** - Top Lens Metal Perf.
- LTO3** - Top Lens Opaque
- LBA3** - Applied LUMENATE® Bottom Lens

LED OPTIONS

- EMR** - Remote Emergency Battery Backup Requires Stem or 2 Power Cords

Project Name	Specifier Name & Location	Quantity
<input type="text"/>	<input type="text"/>	<input type="text"/>

Notes




Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 www.lumetta.com

This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.

Acrylic Drum 23" Pendant AP52314

Design modifications are always welcome.

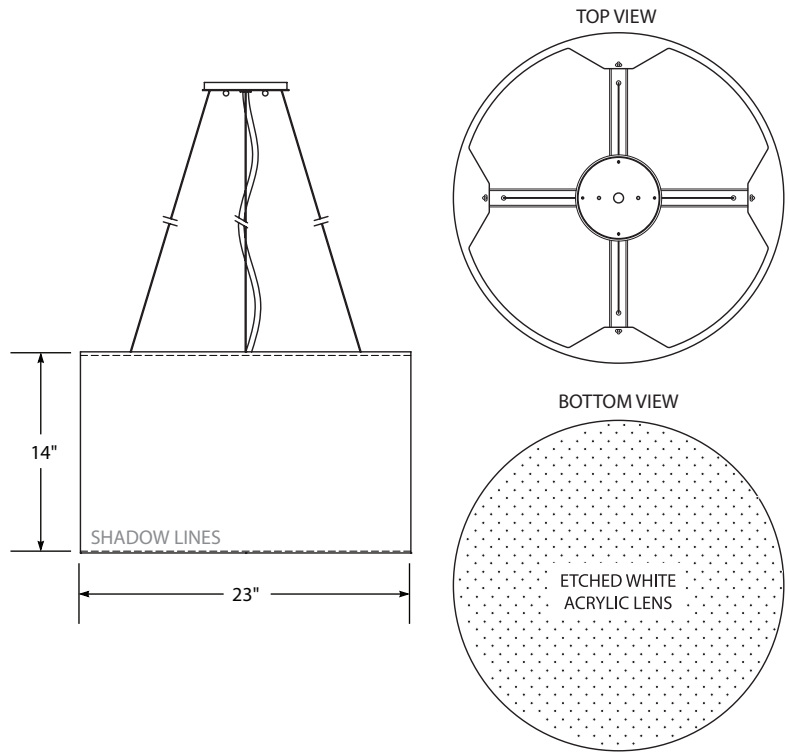

- Acrylic Frame
- LUMENATE® washable diffuser
- Etched white acrylic bottom lens
- 6' black or white cord
- Three suspension cables
- Canopy
- Mounts to standard J-box
- Suitable for damp locations

weight: 7 lbs



AP52314							
FRAME	CANOPY	CORD	DIFFUSER	LAMPING			
White Acrylic	F2 Chrome F3 Black F11 White	Black White	Select from any of our LUMENATE® Diffuser options.	L413 - LED 6420 Initial Lumens 63 W 3000K Dimming: 0-10V 1% UNV or 120V Phase See LED Reference Sheet for component specifications including additional color temperatures. Lamps not included: INC 3/Med. Base		CFL VOLTAGE 120V 277V	

+ OPTIONS

SUSPENSION OPTIONS

STM - Field Cuttable Ball Swivel Stem with 1.78" deep canopy.
Specify length in 1' increments.

CXX3 - Cord Extra (Specify length)

CXS3 - Cord Braided Silver (not LED)

A200 - Wall Mount Arc 34"

CANOPY OPTIONS

CAC - Canopy Alternative Color

CF105 - Flair Canopy 10.5" Dia.

C66 - Square Canopy 6"

C1010 - Square Canopy 10"

CLUSTER CANOPIES - See website for a variety of sizes and options.
Specify arrangement and heights.

LENS OPTIONS

LTC3 - Top Lens Clear Acrylic

LTY3 - Top Lens Metal Perf.

LTO3 - Top Lens Opaque

LBA3 - Applied LUMENATE® Bottom Lens

LED OPTIONS

EMR - Remote Emergency Battery Backup
Requires Stem or 2 Power Cords

Project Name

Specifier Name & Location

Quantity

Notes




Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 www.lumetta.com

This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.


Acrylic Drum 34" Pendant AP53414

Design modifications are always welcome.

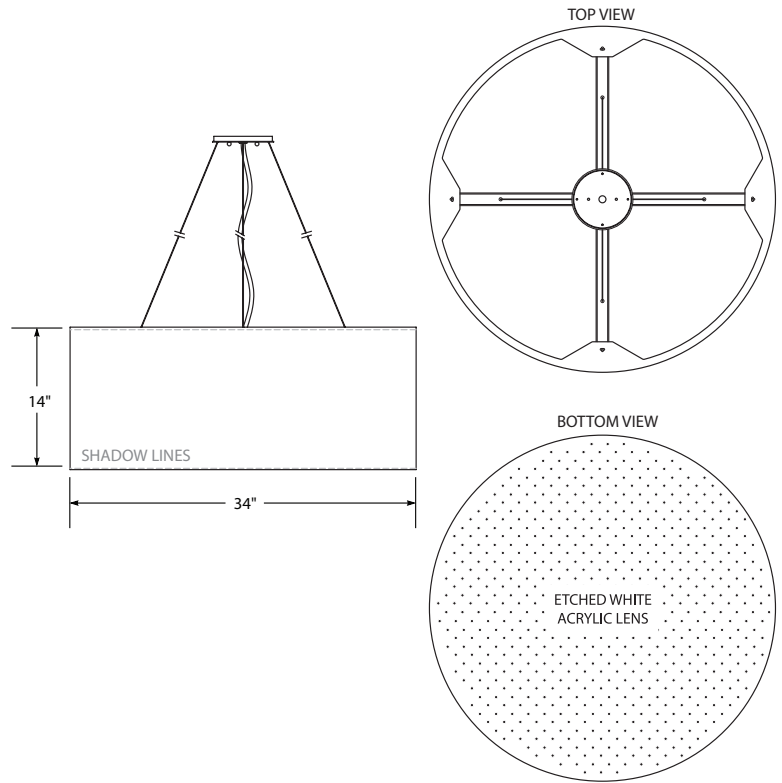

- Acrylic Frame
- LUMENATE® washable diffuser
- Etched white acrylic bottom lens
- 6' black or white cord
- Three suspension cables
- Canopy
- Mounts to standard J-box
- Suitable for damp locations

weight: 11 lbs

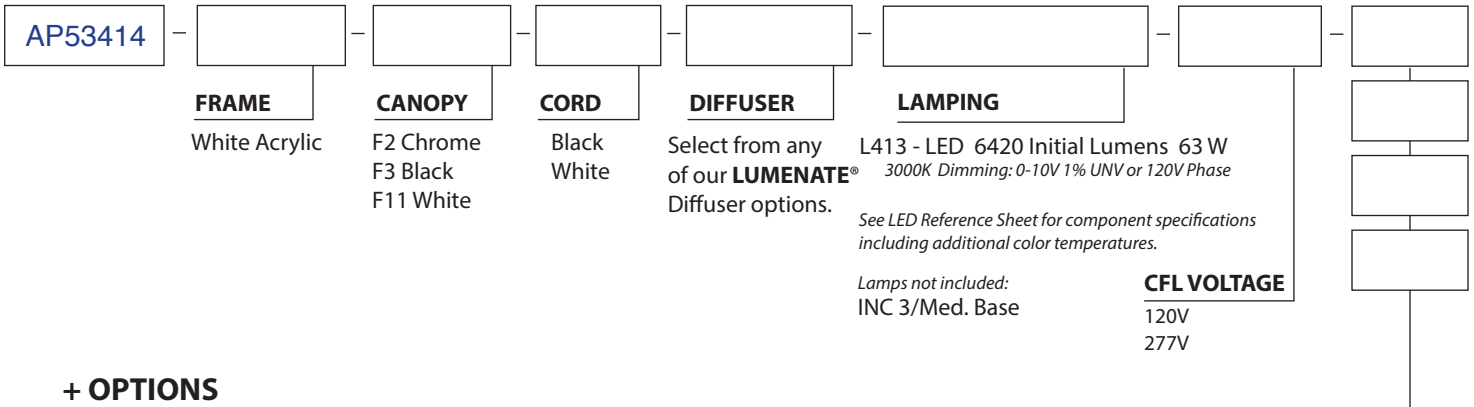

+ OPTIONS

SUSPENSION OPTIONS

- STM** - Field Cuttable Ball Swivel Stem with 1.78" deep canopy. Specify length in 1' increments.
- CXX** - Cord Extra (Specify length)
- CXS3** - Cord Braided Silver (not LED)
- A200** - Wall Mount Arc 34"

CANOPY OPTIONS

- CAC** - Canopy Alternative Color
- CF105** - Flair Canopy 10.5" Dia.
- C66** - Square Canopy 6"
- C1010** - Square Canopy 10"
- CLUSTER CANOPIES** - See website for a variety of sizes and options. Specify arrangement and heights.

LENS OPTIONS

- LTC4** - Top Lens Clear Acrylic
- LTY4** - Top Lens Metal Perf.
- LTO4** - Top Lens Opaque
- LBA4** - Applied LUMENATE® Bottom Lens

LED OPTIONS

- EMR** - Remote Emergency Battery Backup Requires Stem or 2 Power Cords

Project Name Specifier Name & Location Quantity



Notes

Lumetta Inc., 33 Minnesota Ave., Warwick, RI 02888 t 401-691-3994 f 401-921-1310 www.lumetta.com

This design is the intellectual property of Lumetta, Inc. All rights reserved. Specifications are subject to change without notice.