

vision
innovation
creativity
collaboration

Specification Sheet

Project Name:

Specifier Name & Location:

Quantity/Type:



Gen 2 Muse Drum 24" Surface Mount | SMM244G2

The contemporary solution to general lighting applications offers strong lighting properties and even lighting distribution that eases eye strain and makes for a more pleasant work environment.

Included:

- Opaque Lumenate® washable shade
- Mounts to standard J-box
- Etched white acrylic removable bottom lens
- Suitable for damp locations
- Welded steel/aluminum

Weight: 11 lbs



Lamping

L999 0-10V Dimming (19/38W) Direct Output Only

*Higher output available upon request.

Output

- Low – 19W, 2,500 delivered lumens
- Medium – 28.5W, 3,750 delivered lumens
- High – 38W, 5,000 delivered lumens

Color Temperature

- CCT 2700K CRI 90
- CCT 3000K CRI 90
- CCT 3500K CRI 90
- CCT 4000K CRI 90

Other CCTs available upon request.

Voltage


Universal Input (120V - 277V)

LED Options

- EMR - Remote emergency battery backup

Finishes

- F11 White
- F3 Black

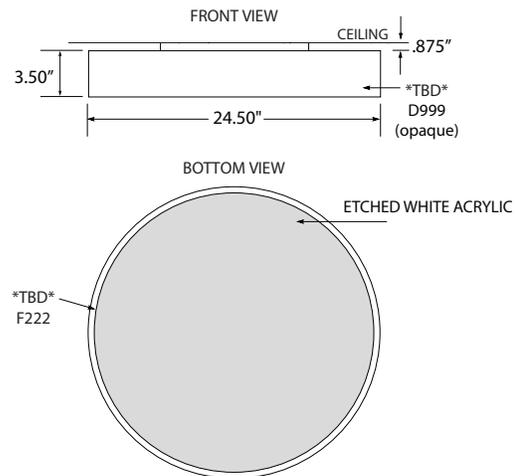


See available shade options on page 2.

Specification Sheet


Shade Options



D610 Chevron



D611 Marble



D612 Squiggle



D613 Maze




D614 Abstract Floral




D615 Freckle




D616 Speckled Clay



D617 Speckled Apricot



D618 Speckled Grey



D619 Speckled Navy