

vision  
innovation  
creativity  
collaboration

## Specification Sheet

Project Name:

Specifier Name & Location:

Quantity/Type:



### Gen 2 Muse Drum 24" Surface Mount | SMM244G2

The contemporary solution to general lighting applications offers strong lighting properties and even lighting distribution that eases eye strain and makes for a more pleasant work environment.

#### Included:

- Opaque Lumenate® washable shade
- Mounts to standard J-box
- Etched white acrylic removable bottom lens
- Suitable for damp locations
- Welded steel/aluminum

Weight: 11 lbs



### Lamping

L999 0-10V Dimming (19/38W) Direct Output Only

\*Higher output available upon request.

#### Output

- Low – 19W, 2,500 delivered lumens
- Medium – 28.5W, 3,750 delivered lumens
- High – 38W, 5,000 delivered lumens

#### Color Temperature

- CCT 2700K CRI 90
- CCT 3000K CRI 90
- CCT 3500K CRI 90
- CCT 4000K CRI 90

Other CCTs available upon request.

#### Voltage

Universal Input (120V - 277V)


#### LED Options

- EMR - Remote emergency battery backup

#### Finishes

- F11 White
- F3 Black

See available shade options on page 2.

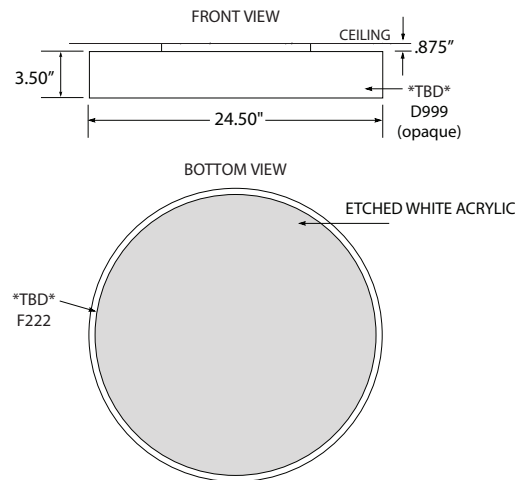


## Specification Sheet


### Shade Options




D610 Chevron



D611 Marble



D612 Squiggle



D613 Maze




D614 Abstract Floral




D615 Freckle




D616 Speckled Clay



D617 Speckled Apricot



D618 Speckled Grey



D619 Speckled Navy